

**NEW**



FIRE SAFETY

## The newest generation of secure cabinets CEMO PROline

# Lighter

body constructed with a modern mix of materials

# More practical

forkliftable, height-adjustable feet

# Safer

self-closing doors in the event of a fire



Cable duct



Load test for fan



innovative door locking  
at top and bottom



Door closing mechanism with  
door locking mechanism

The PROline series meets the current DIN EN 14470-1 standard, making it even safer and more practical. In a fire chamber test at an accredited test institute, this secure cabinet achieved perhaps the

best fire resistance on the market of over 107 minutes. To do justice to the requirements of a professional cabinet, top priority was given to safety and well thought-out functions.

# NEW



## CEMO PROline Secure cabinet 6/20 and 12/20 type 90 PG 9

### Complies with the newest version of DIN EN 14470-1


- 90 minutes fire resistance
- for containers up to 30 litres / 60 litres (order no. 711975)
- safe 2-point locking for optimal access protection
- locking mechanism activates when closing the doors
- self-closing doors in the event of a fire
- door holding in an open condition as standard
- extra safety: load certification for fan centre of gravity on the top of the cabinet
- height-adjustable spill tray shelf, load capacity 75 kg, grid dimension 32 mm
- for connection to technical ventilation, diameter of ventilation opening DN75
- forkliftable, height-adjustable feet, removable base trim
- earthing point on the outside of the cabinet to avoid ignition hazards due to electrostatic charging
- optional: cable duct for installation of measuring equipment, for instance
- cabinet body in grey, doors in RAL 2008/orange (further colours on request)



90  
min.



Matching fans for technical ventilation as accessories

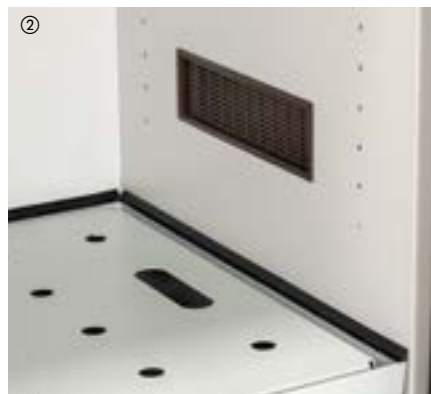

① storage of flammable liquids

② storage of containers up to 30 litres / 60 litres (711975)

③ removable base trim for forklift access



Description		External dimensions cm (l x d x h)	Internal dimensions cm (l x d x h)	Collection volume L	Weight approx. kg	Order no.
Secure cabinet PROline 12/20 type 90		120x60x195	105x49x166	33	450	11880
		120x60x195	105x49x166	66	450	11975
Secure cabinet PROline 6/20 type 90, door left	3 x spill tray shelves, 1 x spill tray base with perforated plate grating	60x60x195	45x49x166	33	265	11911
Secure cabinet PROline 6/20 type 90, door right		60x60x195	45x49x166	33	265	11916

Versions with bottom spill bund and spill tray shelves in stainless steel or with full-size pullouts on request.

### ACCESSORIES SECURE CABINET PROLINE 6/20 AND 12/20

Description	Dimensions cm (l x d x h)	Weight approx. kg	Order no.
Additional spill tray shelf 6/20	45x44x4	2,5	11912
Additional spill tray shelf 12/20	105x44x4	6,5	11881
Cable duct 6/20 and 12/20 (in cabinet ceiling, for self-assembly)	-	-	11884
Accessory pack for active storage For active storage (decanting, filling of hazardous materials in the secure cabinet), the cabinet interior must be earthed.	-	-	on request

Checked & tested – certificates at [www.cemo-group.com/certificates](http://www.cemo-group.com/certificates) | Subject to technical changes/errors. © CEMO 0055-de 11.24

**PROTECTOPLUS GmbH | Albert-Betz-Str. 1 | 24783 Osterröndfeld | Germany | Tel. +49 4331 45160 | [info@protecto.de](mailto:info@protecto.de)**